





**MS 300**  
Single head cutting-off machine

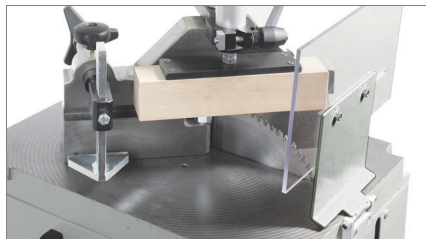


Blade 01

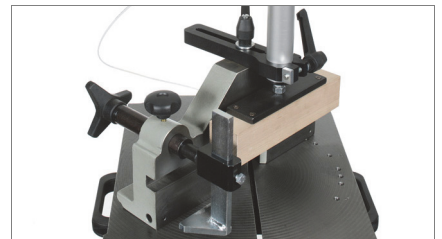




Clamps 02



Single head, rising blade cutting-off machine for cutting at 90°, 45° to right and left, as well as intermediate angles.

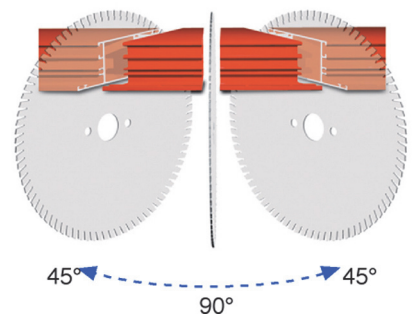

Cutting zone 03

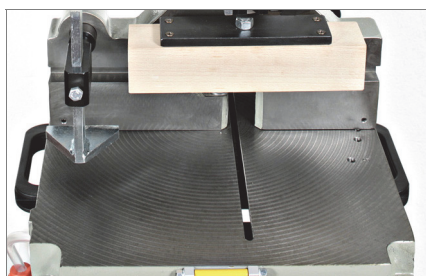

# MS 300

Single head cutting-off machine

## 01 Blade


The cutting-off machine is equipped with a carbide-tipped blade dia. 300 mm, mounted on a manually actuated feed system.

## 02 Clamps

The machine is equipped with a set of horizontal and vertical clamps, which are actuated pneumatically in the S version while they are actuated manually in the M version.

## 03 Cutting zone

The rugged cast iron horizontal work table with relative vertical fence rigidly coupled to the table forms the workpiece clamping area, extending over a considerable support area to allow optimum clamping of the workpieces.

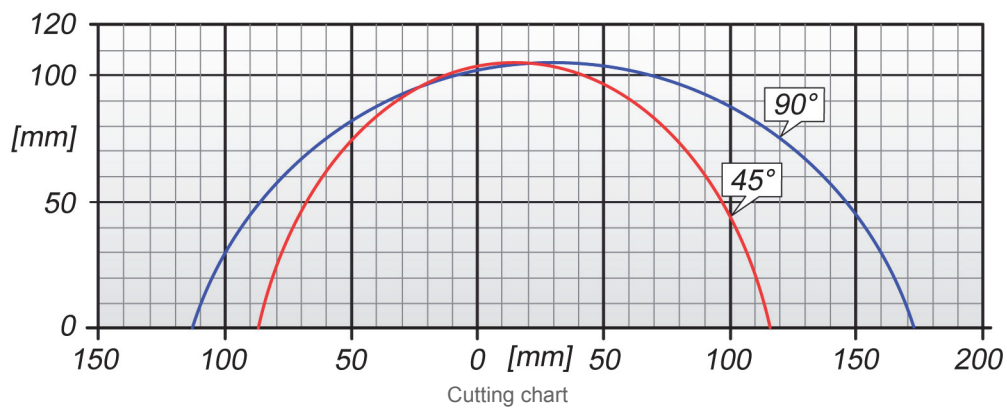

<b>BLADE</b>	
Carbide-tipped blade dia. (mm)	300
<b>BLADE FEED</b>	
Manual	
<b>CUTTING ZONE GUARDS</b>	
Local guard, mechanically operated	
<b>LUBRICATION SYSTEM</b>	
Manual	
<b>CLAMPS</b>	
Manual or pneumatic vertical clamp (depending on model)	1
Manual horizontal clamp	1
<b>MOTOR</b>	
Three-phase brake motor, operating time 10 sec. (kW)	1,5